
ArmorSeal®



The Sherwin-Williams line of ArmorSeal Heavy Duty Floor
Coatings gives you the performance you demand — from
aesthetics to durability to safety to governmental compliance
and more. So no matter what your floor coatings needs are, you
can be sure we've got you covered. And with our commitment
to innovation, you can count on Sherwin-Williams to bring you
more new products in the years to come.

2005 Technologies

ExpressTech[™]

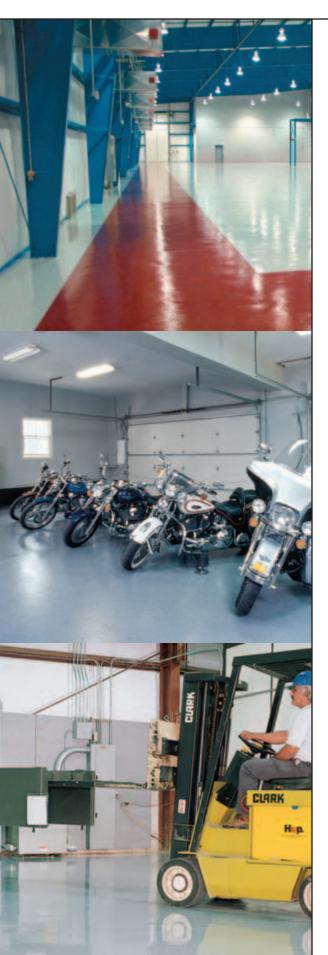

Shorter curing time.
For greater durability and faster return to service.

AVAILABLE IN A VARIETY OF ARMORSEAL PRODUCTS.

ExpressTech represents technologies that speed up the curing time, to improve the overall quality of the job. ExpressTech coatings also require fewer coats, which not only lowers your labor costs, but also gets your operation back into service faster. To learn more about the quality advantages of ExpressTech coatings, contact your local Sherwin-Williams representative.

EnviroSpec[™]



The first complete line of waterborne coatings to deliver safety, performance and VOC compliance.

THE ADVANTAGE OF WATERBORNE WITHOUT COMPROMISING PERFORMANCE.

Thanks to EnviroSpec's advanced resin technology, you can now get the performance characteristics of solvent-based coatings in a VOC compliant waterborne coating. Using smaller resin particles that result in a tighter film, EnviroSpec provides better adhesion, durability and color retention. EnviroSpec works specifically with Sherwin-Williams' proprietary EnviroToners™ colorants to give you the long-lasting appearance your project demands.





2005 Products

33 Epoxy Primer/Sealer

100% Solids Primer

Cures fast, improves adhesion.

This low-viscosity, 100% solids, high-build epoxy primer is designed for use under ArmorSeal 650 SL/RC and ArmorSeal 650 HB or where a high build primer is needed. This product enhances adhesion by penetrating into the concrete substrate. It also helps to reduce outgassing, bubbling and pinholes that may occur when coating porous surfaces with high build coatings.

650 SL/RC

100% Solids Self-Leveling Epoxy

Provides a seamless hygienic coating system that is extremely durable.

This product is a 100% solids, two component, self-leveling epoxy floor coating. It can be applied to smooth or mildly spalled concrete where a self-leveling high gloss finish is required. Suitable for USDA inspected facilities, 650 SL/RC is perfect for clean rooms, aircraft hangars, laboratories, workshops and light assembly areas. This epoxy may be topcoated if desired.

1000 HS

High Solids Epoxy Floor Coating

For superior resistance to chemicals, moisture, abrasion and impact.

This two-component, high-solids, polyamide epoxy coating is formulated for demanding industrial and marine applications. A heavy-duty interior/exterior coating, this product can be applied to concrete, steel and wood surfaces. It has excellent resistance to alkalies, acids, solvents, jet fuel and grease, and is suitable for use in USDA inspected facilities. An anti-slip additive, such as Shark-Grip, may be added to meet ADA requirements for slip resistance for floors.

ArmorSeal® 1K

Waterbased Urethane

Provides outstanding color and gloss performance.

This single component urethane floor enamel delivers performance comparable to a two-component urethane. Aesthetically, it provides a high gloss, wet look. And because it's resistant to "hot-tire-pick-up" and abrasion, it will maintain its excellent appearance. ArmorSeal 1K dries fast and meets all current VOC regulations.

FloorThane

Heavy-Duty Polyurethane Industrial Floor Coating

Provides superior gloss and color retention.

FloorThane is a two-component exterior/interior high solids polyesteraliphatic urethane coating. This VOC-compliant product provides a high-gloss flexible finish with maximum gloss and color retention. It's resistant to chalk, chemicals, impact and abrasion.

Rexthane I

Moisture Cure Urethane

Excellent durability and VOC compliance.

Rexthane I is a single-component, aliphatic moisture cure urethane floor coating that offers outstanding performance. This product cures to a high-gloss, chemical-resistant film equivalent to two part urethane coatings. It's VOC-compliant and meets USDA standards.

Tread-Plex

100% Acrylic Water-Based Floor Coating

A general-purpose interior/exterior coating.

Tred-Plex dries rapidly to a tough alkali resistant finish and is suitable for use in USDA inspected facilities, laboratories, light assembly and production areas, and hospitals. It's VOC complaint and meets ADA requirements for slip resistance for floors.

Waterbased Epoxy Primer

Low-VOC primer

For use on concrete.

This product is a two-component high-build pigmented, waterbased epoxy primer designed for use on concrete under ArmorSeal floor coatings. This low-VOC product can be used on damp substrates where a high-build epoxy is needed.

To learn more about our complete line of coatings, equipment and painting supplies, contact your Sherwin-Williams representative or call 1-800-524-5979 to have a representative contact you.

